

DESCRIPTION

The **SD012-UVC-011** is an AlGaIn **UVC** photodiode with a 0.076 mm² active area, hermetically assembled in TO-46 package. Unlike most UV detectors it cuts off unwanted visible light from its detection spectrum (**210-280nm**), thereby eliminating the need for optical filter.

RELIABILITY

This Luna high-reliability device is in principle able to meet military test requirements (Mil-STD-750, Mil-STD-883) after proper screening and group test. Contact Luna for recommendations on specific test conditions and procedures.

ABSOLUTE MAXIMUM RATINGS

SYMBOL	MIN		MAX	UNITS	
Storage Temperature	-40	to	+125	°C	-
Operating Temperature	-30	to	+85	°C	-
Soldering Temperature	-	to	+260	°C	T _a = 23°C UNLESS NOTED OTHERWISE
Forward Current	-	to	1.0	mA	-
Reverse Voltage	-	-	5.0	V	-

FEATURES

- Schottky-Type Photodiode
- Photovoltaic Mode Operation
- Low Noise
- High Speed
- Visible Blindness

APPLICATIONS

- UVC Detection and Monitoring
- Medical
- Military


OPTO-ELECTRICAL PARAMETERS

T_a = 23°C UNLESS NOTED OTHERWISE


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Dark Current	V _R = 0.1V	-	0.1	100	pA
Shunt Resistance	V _R = 10 mV	1.0	100	-	GΩ
Short Circuit Current	UVI=1.0	-	20	-	nA
Spectral Application Range	Spot Scan	210	-	280	nm
Responsivity Peak	λ = 275 nm V, V _R = 0 V	-	0.06	-	A/W
Capacitance	V _{bias} = 0V; f = 1 MHz	-	10	-	pF
Noise Equivalent Power	λ = 350 nm	-	1.6	-	10 ⁻¹⁷ W/Hz ^{0.5}

TYPICAL PERFORMANCE


SPECTRAL RESPONSE

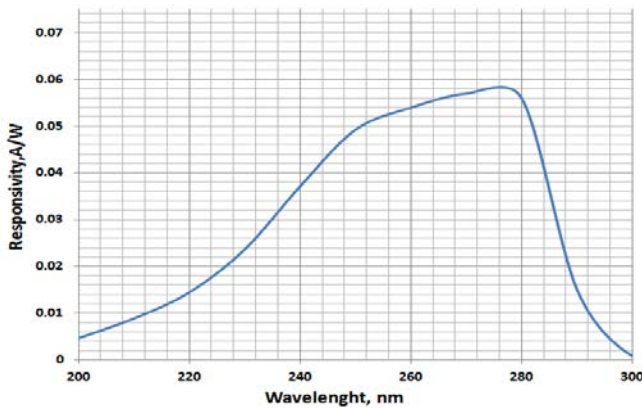

NOISE vs. BIAS

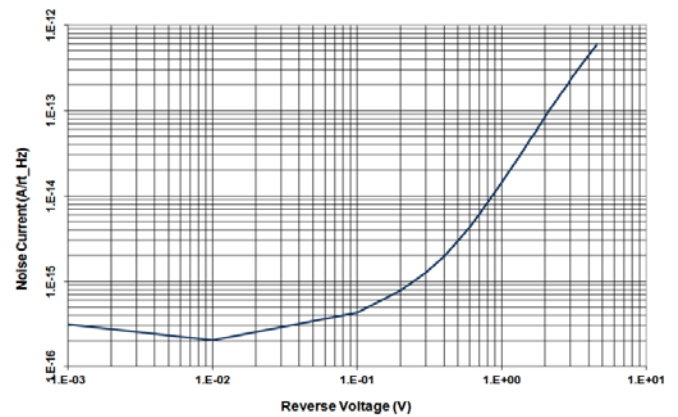

UV-A PHOTOCURRENT

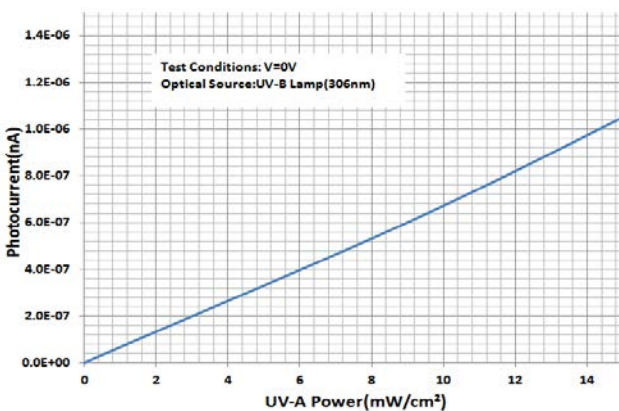

UV-I PHOTOCURRENT

